

# Stage Curtain Track

## Janson Track Systems

U.S. Patent Numbers 4014071, 4134177, 4318252

● **CARRIER NO. 416:** Heavy duty extruded carrier body with rope guide, swivel, and trim chain with two nylon wheels, each with a precision ball bearing at the hub.

● **MASTER CARRIER NO. 417:** Four nylon wheels supported from plated steel body with four ball bearings. Two clamps shall be provided for anchoring line or cable.

● **DOUBLE END PULLEY, NO. 403:** Equipped with two nylatron wheels, 4 inch diameter, with ball bearings at each hub. Extruded aluminum housing prevents operating line from escaping the pulley grooves.

● **SINGLE END PULLEY, NO. 404:** Equipped with nylatron wheels, 4 inch diameter, with ball bearings at the hub. Extruded aluminum housing prevents operating line from escaping the pulley grooves.

● **ADJUSTABLE FLOOR BLOCK, NO. 408:** Equipped with nylatron wheel, 4 inch diameter, with ball bearings at the hub. Steel housing allows 9 inches of adjustment to tighten operating line.



● **DETACHABLE FLOOR BLOCK KIT, NO. 408DK:** 7 gauge steel plate with hardware for use with floor block for quick release.

● **OPERATING LINE, NO. 414:** Braided, polypropylene handline, number 12 (3/8 inch diameter) for manual operation.

● **RUBBER BUMPER, NO. 431:** Neoprene bumpers for placement between carriers to reduce noise.


● **CENTER ROPE SUPPORT, NO. 409:** Eyebolt with special clamp to support operating line at center lap. Pair required for overlapping track sections.

● **OVERLAP CLAMP, NO. 405:** Center clamp to hold overlapping track sections at midpoint of the overlap.

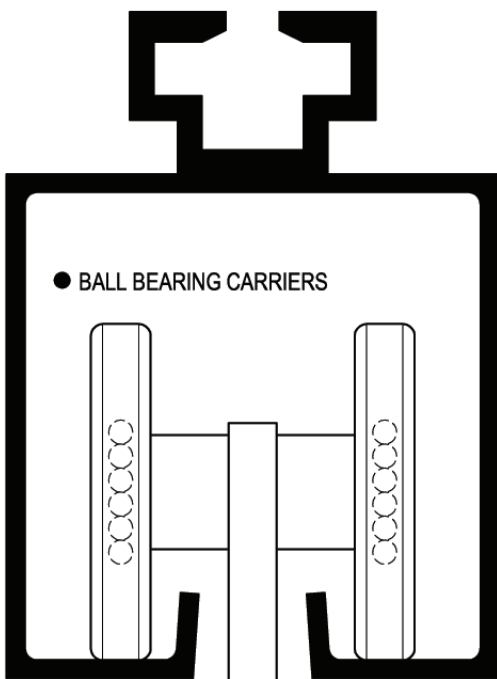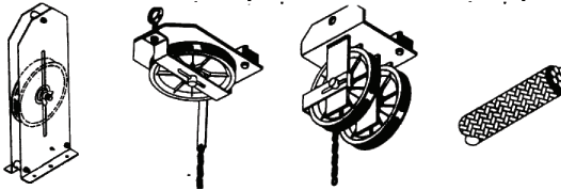

● BALL BEARING CARRIERS

JANSON INDUSTRIES #J9000AL

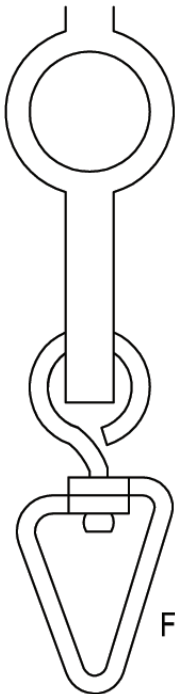

FULL SCALE

### SPECIFICATIONS:

Stage curtain track shall be heavy duty, ball bearing type, Janson #J9000AL, or approved equal, complete with all necessary accessories. (Janson Industries, Fax 330.455.5919; Phone: 800.548.8982).

Track shall be constructed of extruded aluminum (mill finish) with continuous slot in bottom. Straight track shall be furnished with continuous operating line, ball bearing end pulleys, and ball bearing floor pulley. Carriers shall be constructed in pendant style using ball bearings and two wheels for each carrier. Neoprene washers shall be located between each curtain carrier to reduce noise of operation. Carrier body shall have heavy duty swivel eye and trim chain for attachment of curtain snap or S-hook. End pulleys and floor pulley shall incorporate 4 inch wheels with ball bearings in the hubs. Pulley housings shall prevent operating line from escaping the pulley grooves. End stops and adjustable floor block shall be provided to maintain proper tension on stretch resistant black 3/8 inch braided polypropylene operating line.



## JANSON INDUSTRIES

T (330)455-7029  
F (330)455-5919

TOLL FREE  
(800)548-8982

1200 Garfield Ave. SW  
P.O. Box 6090  
Canton, Oh 44706